



Security Fencing

ZH-FENCE.COM



Security Fencing

ZH fence is the industry leader in commercial security fencing and is available off the shelf or in custom form. It can be custom designed to suit any project, be it school fencing, commercial security fencing, government facility fencing, or domestic boundary fencing.

Panels and gates are manufactured from 40 x 40 mm rails, square pickets punched through & welded then finished with a pressed spear for the Ultimate security solution.

Our security fencing is available in high tensile, long lasting power coated galvanized, aluminum and powder coated

A wide range of heavy duty steel posts, panel accessories and security fixings are also available to complete the range.



Suitable Usage

- Commercial Security
- Residential Security
- Boundary Fencing
- Dog Fencing
- Sliding and Swing Gates can be manufactured to incorporate Coloursmart Colorbond Fencing



Panel Details

- **Standard Panels:**
 - 2400mm x 1800mm
 - 2400mm x 2100mm
- 40 x 40mm Rails
- 25 x 25 Square tubes with pressed spear top



Tools Required

- Tape Measure
- String line
- Post Hole Shovel
- Cordless Battery Drill
- Hex Head Drill Bit (5/16)
- Soft End Mallet
- Concrete Mix




Handy Hints

- Check for underground
- It's best to allow at least 24 hours for posts to set in concrete before installing your panels/gates
- Panels & posts can be easily cut down with a hacksaw or grinder
- Remove all metal filings and concrete splatter on completion of installation

Materials Checklist

- A** Panels
- B** Brackets
- C** Gate
- D** Gate Fittings
- E** Posts

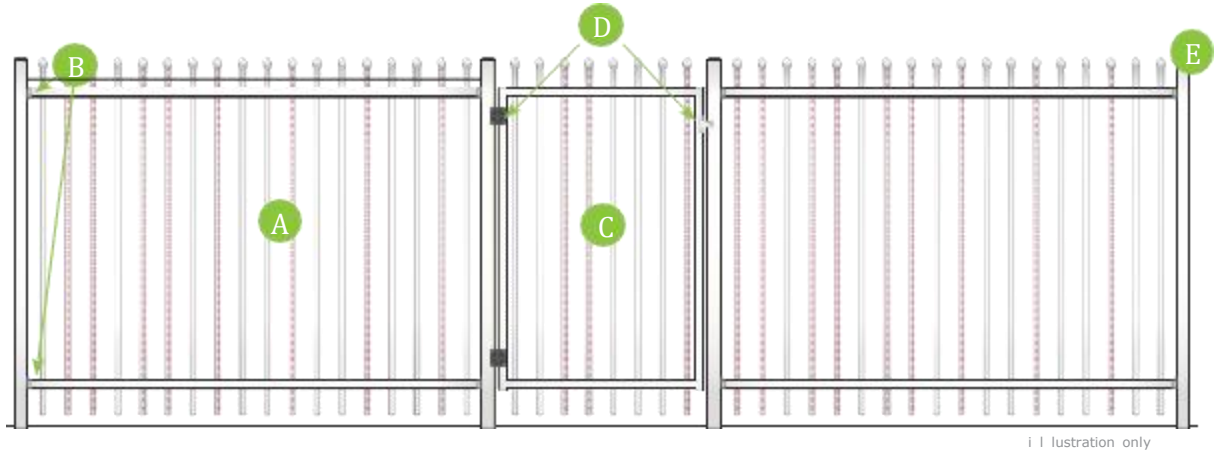

i | lustration only

- ## 1 Site Plan


 - Decide on fence position and measurements of panels & posts by creating a mud map of your site.
- ## 2 String Line & Post Holes

 - Set String line along the desired line of the fence, close to the ground - this is the bottom line of your fence panels
 - Measure out all holes, starting with the gate post holes
 - Dig post holes along string line 600mm deep x 250mm in diameter
 - Posts should sit approx. 500mm into the post holes
- ## 3 Install Posts

 - Ensure post centres are accurate (see below diagram for details)
 - Ensure posts are flush and level along string line then pour concrete around posts up to 50mm above ground level and taper away from post
 - If you are using flanged posts, fix with appropriate concrete or timber fixings
- ## 4 Install Panels

 - Attach panels to posts using Panel Brackets & Self Tapping Tek Screws
 - 2 Rail panel styles require 4 brackets
 - Ensure the bottom of panels are no more than 100mm off the ground at anypoint
 - Recommended height off the ground is 50-80mm
- ## 5 Install Gate(s)

 - Attach hinge & latch components of Gate Kit to gate as per instructions
 - double swing gates and sliding gates all have differing methods of installation.
 - Tap on Post caps with soft end mallet

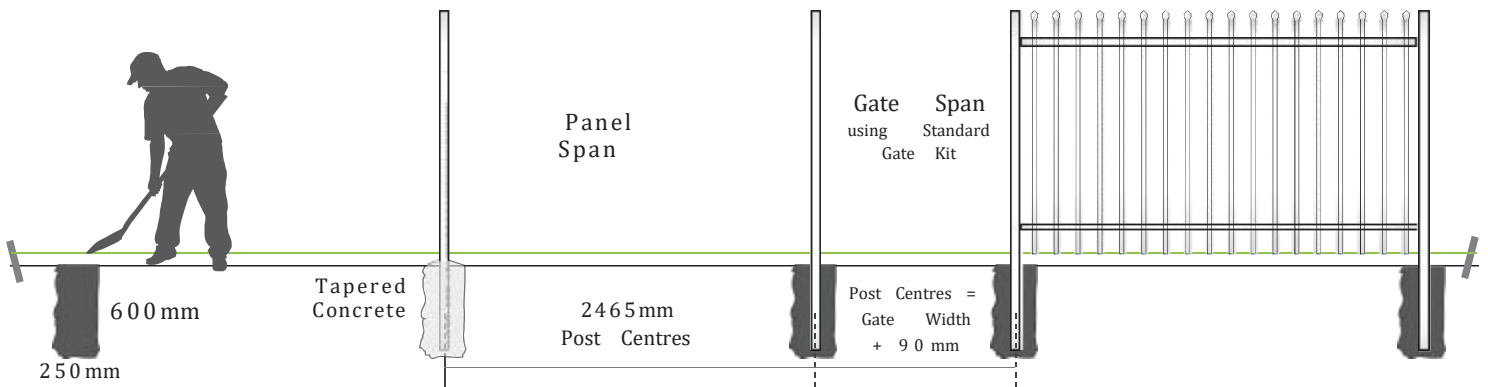

Care Instructions & Warranty:

Exposure to U.V. light, pollution, salt deposits and chemicals can affect the long term performance of the fencing coating if not removed with regular washing.

A regular monthly clean with a soft brush, warm water and mild detergent followed by a rinse of fresh water will maintain the finish of both powder coated, Steel fencing components and fulfil warranty conditions.

10 Year
Warranty
Conditions Apply

Product List

PANEL TYPE

| TYPE | DESCRIPTION |
|---------|-------------------|
| ZH-2418 | W 2400 x H 1800mm |
| ZH-2420 | W 2400 x H 2000mm |
| ZH-2421 | W 2400 x H 2100mm |
| ZH-2009 | W 2000 x H 900mm |
| ZH-2015 | W 2000 x H 1500mm |
| ZH-2018 | W 2000 x H 1800mm |

POSTS

| TYPE | DESCRIPTION |
|----------|------------------------------------|
| ZHP-2418 | 60 x 60; 80 x 80; 100 x 100 2400mm |
| ZHP-2420 | 60 x 60; 80 x 80; 100 x 100 2700mm |
| ZHP-2421 | 60 x 60; 80 x 80; 100 x 100 3000mm |
| ZHP-2009 | 60 x 60; 80 x 80; 100 x 100 1500mm |
| ZHP-2015 | 60 x 60; 80 x 80; 100 x 100 2100mm |
| ZHP-2018 | 60 x 60; 80 x 80; 100 x 100 2400mm |

COMPANY DETAILS

ANPING ZHONGHAO TRAFFIC SAFETY FACILITIES CO., LTD IS LOCATED IN ANPING HEBEI CHINA . WE SPECIALIZE IN VARIOUS KINDS OF WELDED WIRE FENCE PANELS, TEMPORARY FENCE,CHAIN LINK FENCE ETC. PRODUCTS.

AREA: 30000M2

NO. OF EMPLOYEES: 150 PEOPLE

NO. OF QA/QC INSPECTOR(S): 8 PEOPLE

EXPORT MARKETS: EUROPE, SOUTH AMERICA, AUSTRALIAN, NORTH AMERICA ETC.

CERTIFICATES: BV REPORT, CE CERTIFICATE, ISO9001 CERTIFICATE, SGS CERTIFICATE

